


HMEC

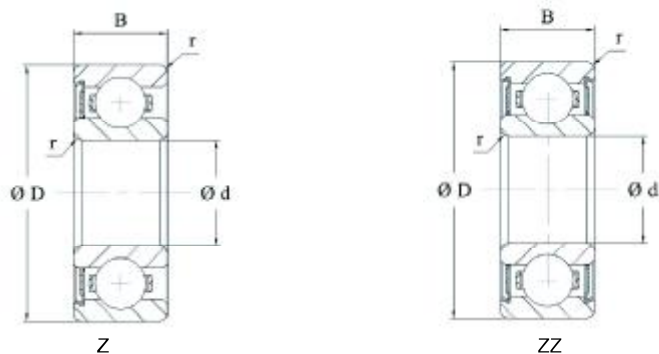

| Shaft diameter | Dimensions | | | | Load rating | | Limiting speed | Code bearing | Mass |
|----------------|------------|-----|----|------------|-------------|-------------------|----------------|------------------|-------|
| | d | D | B | r_{\min} | dyn. C | stat. Co | | | |
| | mm | | | | kN | min^{-1} | | | |
| | | | | | | | | | |
| 50 | 50 | 80 | 16 | 1 | 20.8 | 15.6 | 20000 | 6010 | 0.272 |
| | 50 | 80 | 16 | 1 | 20.8 | 15.6 | 8500 | 6010.ZZ | 0.282 |
| | 50 | 80 | 16 | 1 | 20.8 | 15.6 | 5600 | 6010.2RS | 0.283 |
| | 50 | 90 | 20 | 1.1 | 36.5 | 24 | 18000 | 6210 | 0.466 |
| | 50 | 90 | 20 | 1.1 | 36.5 | 24 | 7500 | 6210.ZZ | 0.478 |
| | 50 | 90 | 20 | 1.1 | 36.5 | 24 | 4800 | 6210.2RS | 0.48 |
| | 50 | 90 | 23 | 1.1 | 36.5 | 24 | 4800 | 62210.2RS | 0.543 |
| | 50 | 110 | 27 | 2 | 62 | 38 | 14000 | 6310 | 1.1 |
| | 50 | 110 | 27 | 2 | 62 | 38 | 6000 | 6310.ZZ | 1.12 |
| | 50 | 110 | 27 | 2 | 62 | 38 | 4000 | 6310.2RS | 1.12 |
| | 50 | 110 | 40 | 2 | 62 | 38 | 4000 | 62310.2RS | 1.59 |
| | 50 | 130 | 31 | 2.1 | 81.5 | 52 | 12000 | 6410 | 1.96 |
| 55 | 55 | 72 | 9 | 0.3 | 8.80 | 8.50 | 10000 | 6811 | 0.081 |
| | 55 | 72 | 9 | 0.3 | 8.80 | 8.50 | 8500 | 6811.ZZ | 0.081 |
| | 55 | 72 | 9 | 0.3 | 8.80 | 8.50 | 4800 | 6811.2RS | 0.081 |
| | 55 | 80 | 13 | 1 | 16.00 | 13.30 | 9500 | 6911 | 0.189 |
| | 55 | 80 | 13 | 1 | 16.00 | 13.30 | 8000 | 6911.ZZ | 0.189 |
| | 55 | 80 | 13 | 1 | 16.00 | 13.30 | 4500 | 6911.2RS | 0.189 |
| | 55 | 90 | 11 | 0.6 | 19.3 | 16.3 | 18000 | 16011 | 0.266 |
| | 55 | 90 | 18 | 1.1 | 28.5 | 21.2 | 18000 | 6011 | 0.397 |