


HMEC

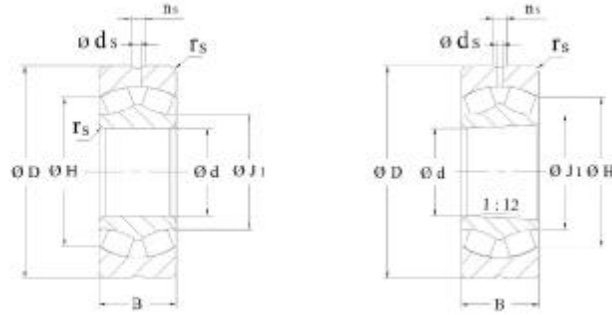

K (1:12): K30 (1:30)

Shaft diameter	Dimensions				Load rating		Limiting speed	Reference speed	Code Bearing	Mass
	d	D	B	$r_{s \min}$	dyn. Cr	stat. Cor				
	mm				kN		min^{-1}		HMEC	≈ kg
100	100	180	60.3	2.1	465	655	3600	2400	23220K	6.13
	100	215	47	3	425	530	3600	3200	21320	8.19
	100	215	47	3	425	530	3600	3200	21320K	8.08
	100	215	73	3	655	815	3000	2600	22320	13
	100	215	73	3	655	815	3000	2600	22320K	12.7
	100	215	82.6	3	680	900	2800		23320	15.5
110	110	170	45	2	335	510	4300	3200	23022	3.67
	110	170	45	2	335	510	4300	3200	23022K	3.55
	110	180	56	2	440	670	4000	2600	23122	5.51
	110	180	56	2	440	670	4000	2600	23122K	5.1
	110	180	69	2	520	880	2600	1800	24122	6.85
	110	180	69	2	520	880	2600	1800	24122K30	6.69
	110	200	53	2.1	455	585	4000	3000	22222	6.99
	110	200	53	2.1	455	585	4000	3000	22222K	6.82
	110	200	69.8	2.1	600	850	3000	2200	23222	9.54
	110	200	69.8	2.1	600	850	3000	2200	23222K	8.82
	110	240	50	3	510	640	3000	2800	21322	11.1
	110	240	50	3	510	640	3000	2800	21322K	10.9
	110	240	80	3	800	1060	2600	2200	22322	17.7