


HMEC

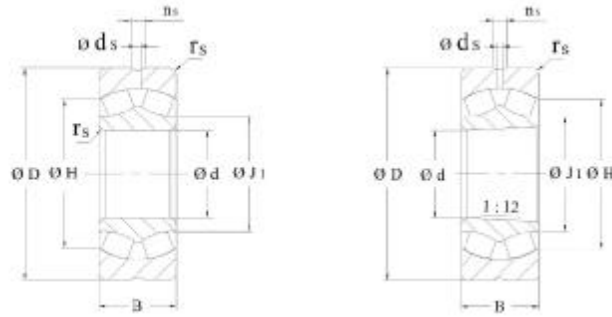

K (1:12); K30 (1:30)

Shaft diameter	Dimensions				Load rating		Limiting speed	Reference speed	Code Bearing	Mass	
	d	D	B	r _{s min}	dyn. Cr	stat. Cor					
	mm				kN		min ⁻¹		HMEC	≈	
										kg	
130	130	200	52	2	455	720	3600	2600	23026K	5.7	
	130	200	69	2	570	1020	2600	2000	24026	7.72	
	130	200	69	2	570	1020	2600	2000	24026K30	7.57	
	130	210	64	2	570	865	3000	2200	23126	8.45	
	130	210	64	2	570	865	3000	2200	23126K	8.1	
	130	210	80	2	695	1180	2200	1500	24126	10.6	
	130	210	80	2	695	1180	2200	1500	24126K	10.1	
	130	230	64	3	630	880	3000	2600	22226	11.3	
	130	230	64	3	630	880	3000	2600	22226K	10.9	
	130	230	80	3	765	1140	2600	1800	23226	14	
	130	230	80	3	765	1140	2600	1800	23226K	13.6	
	130	280	93	4	1040	1340	2400	1900	22326	28	
	130	280	93	4	1040	1340	2400	1900	22326K	27.4	
	130	280	112	4	1160	1600	2200		22326C4	35.2	
	140	140	210	53	2	480	780	3600	2400	23028	6.45
		140	210	53	2	480	780	3600	2400	23028K	6
140		225	68	2.1	640	1000	2800	1900	23128	10.2	
140		225	68	2.1	640	1000	2800	1900	23128K	9.66	
140		250	68	3	735	1020	2400	2400	22228	14.2	