



## HMEC

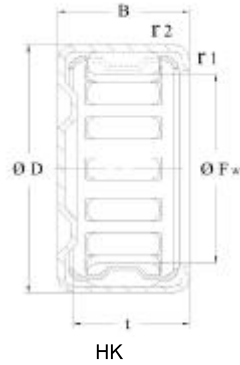

Shaft diameter	Dimensions					Load ratings		Speed ratings		appropriate inner ring	Code bearing HMEC	Weight ≈ kg
	F <sub>w</sub>	D	B	t	r <sub>1</sub> , r <sub>2</sub> min	dyn. C	stat. Co	min <sup>-1</sup>				
	mm					kN		ng grease	ng Oil			
22	22	28	12	-	1	8.65	13.4	7500	12000	IR 17x22x13	<b>HK 2212</b>	0.018
	22	28	12	9.3	1	8.65	13.4	7500	12000	IR 17x22x13	<b>BK 2212</b>	0.02
	22	28	16	-	1	12.5	21.2	7500	12000	IR 17x22x16	<b>HK 2216</b>	0.024
	22	28	16	13.3	1	12.5	21.2	7500	12000	IR 17x22x16	<b>BK 2216</b>	0.027
	22	28	20	-	1	14.6	25.5	7500	12000	IR 17x22x23	<b>HK 2220</b>	0.035
	22	28	20	17.3	1	14.6	25.5	7500	12000	IR 17x22x23	<b>BK 2220</b>	0.04
25	25	32	12	-	1	10.8	15.6	6700	10000	-	<b>HK 2512</b>	0.023
	25	32	12	9.3	1	10.8	15.6	6700	10000	-	<b>BK 2512</b>	0.025
	25	32	16	-	1	15.6	25	6700	10000	IR 20x25x17	<b>HK 2516</b>	0.025
	25	32	16	13.3	1	15.6	25	6700	10000	IR 20x25x17	<b>BK 2516</b>	0.027
	25	32	20	-	1	19.6	34	6700	10000	IR 20x25x20.5	<b>HK 2520</b>	0.039
	25	32	20	17.3	1	19.6	34	6700	10000	IR 20x25x20.5	<b>BK 2520</b>	0.043
	25	32	26	-	1	23.6	43	6700	10000	IR 20x25x26.5	<b>HK 2526</b>	0.05
	25	32	26	23.3	1	23.6	43	6700	10000	IR 20x25x26.5	<b>BK 2526</b>	0.054
	25	32	38	-	1	33.5	68	6700	10000	IR 20x25x38.5	<b>HK 2538</b>	0.073
25	32	38	35.3	1	33.5	68	6700	10000	IR 20x25x38.5	<b>BK 2538</b>	0.077	
28	28	35	16	-	1	15.3	25.5	6300	9500	IR 22x28x17	<b>HK 2816</b>	0.034
	28	35	16	13.3	1	15.3	25.5	6300	9500	IR 22x28x17	<b>BK 2816</b>	0.038
	28	35	20	-	1	20	36	6300	9500	IR 22x28x20.5	<b>HK 2820</b>	0.042
	28	35	20	17.3	1	20	36	6300	9500	IR 22x28x20.5	<b>BK 2820</b>	0.047
30	30	37	12	-	1	11.2	17.3	5600	8500	-	<b>HK 3012</b>	0.028
	30	37	12	9.3	1	11.2	17.3	5600	8500	-	<b>BK 3012</b>	0.031
	30	37	16	-	1	16	28	5600	8500	IR 25x30x17	<b>HK 3016</b>	0.038
	30	37	16	13.3	1	16	28	5600	8500	IR 25x30x17	<b>BK 3016</b>	0.041
	30	37	20	-	1	21.6	40.5	5600	8500	IR 25x30x20.5	<b>HK 3020</b>	0.047