



## HMEC

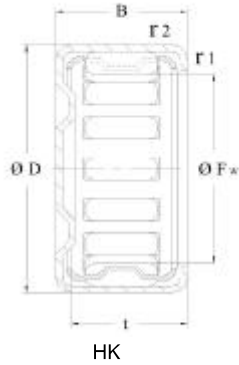

Shaft diameter	Dimensions					Load ratings		Speed ratings		appropriate inner ring	Code bearing HMEC	Weight ≈ kg
	F <sub>w</sub>	D	B	t	r <sub>1</sub> , r <sub>2</sub> min	dyn. C	stat. Co	min <sup>-1</sup>				
	mm					kN		ng grease	ng Oil			
12	12	18	14	1	1	6.6	7.8	12000		-	<b>HK 1210RS</b>	0.013
	12	18	16	1	1	6.6	7.8	12000		-	<b>BK 1212.2RS</b>	0.016
14	14	20	14	1	1	6.8	8.5	11000		IR 10x14x16	<b>HK 1412RS</b>	0.015
	14	20	16	1	1	6.8	8.5	11000		IR 10x14x20	<b>HK 1416.2RS</b>	0.018
15	15	21	14	1	1	7.5	9.8	11000		IR 12x15x16.5	<b>HK 1514RS</b>	0.016
	15	21	16	1	1	7.5	9.8	11000		IR 12x15x16.5	<b>HK 1516.2RS</b>	0.019
16	16	22	14	1	1	7.4	9.8	10000		IR 12x16x16	<b>HK 1614RS</b>	0.016
	16	22	16	1	1	7.4	9.8	10000		IR 12x16x20	<b>HK 1616.2RS</b>	0.020
18	18	24	14	1	1	8.0	11.2	9500		IR 15x18x16.5	<b>HK 1814RS</b>	0.019
	18	24	16	1	1	8.0	11.2	9500		IR 15x18x16.5	<b>HK 1816.2RS</b>	0.020
20	20	26	16	1	1	8.5	12.7	8500		IR 17x20x16.5	<b>HK 2016.2RS</b>	0.023
	20	26	18	1	1	11.8	19	8500		IR 17x20x20.5	<b>HK2018RS</b>	0.025
	20	26	20	1	1	11.8	19	8500		IR 17x20x20.5	<b>HK 2020.2RS</b>	0.028
22	22	28	16	1	1	8.6	13.4	7500		-	<b>HK 2216.2RS</b>	0.025
	22	28	18	1	1	12.5	21.2	7500		IR 17x22x23	<b>HK 2218RS</b>	0.028
	22	28	20	1	1	12.5	21.2	7500		IR 17x22x23	<b>HK 2220.2RS</b>	0.030