



Drawn Cup roller clutches
Series HF
HF..KF

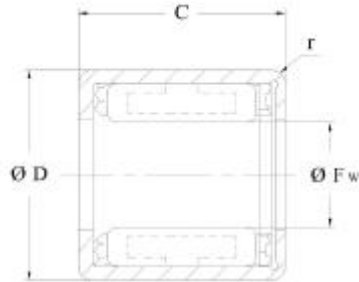

HF, HF..KF

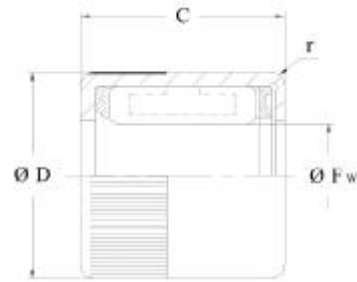

HF..R, HF..KFR with knurled outer ring

Shaft diameter	Dimensions				Permissible torque Md	Limiting speeds		Code bearing HMEC		Mass ≈ g
	Fw	D	C	r _{min.}		n _{GW} ²⁾	n _{GA} ³⁾	Plastic springs	Steel springs	
	mm				Nm	min ⁻¹	min ⁻¹			
3	3	6.5	6	0.3	0.18	45000	8000	HF 0306 KF	-	1
	3	6.5	6	0.3	0.06	45000	8000	HF 0306KFR	-	1
4	4	8	6	0.3	0.34	34000	8000	HF 0406KF	-	1
	4	8	6	0.3	0.1	34000	8000	HF 0406KFR	-	1
6	6	10	12	0.3	1.76	23000	13000	HF 0612 KF	HF 0612	3
	6	10	12	0.3	0.5	23000	13000	HF 0612KFR	HF 0612	3
8	8	12	12	0.3	3.15	17000	12000	HF0812KF	HF 0812	3.5
	8	12	12	0.3	1	17000	12000	HF0812KFR	HF 0812R	3.5
10	10	14	12	0.3	5.3	14000	11000	HF 1012KF	HF 1012	4
12	12	18	16	0.3	12.2	11000	8000	-	HF1216	11
14	14	20	16	0.3	17.3	9500	8000	-	HF1416	13
16	16	22	16	0.3	20.5	8500	7500	-	HF 1616	14
18	18	24	16	0.3	24.1	7500	7500	-	HF1816	16