


**Needle roller and cage assemblies
Series K**

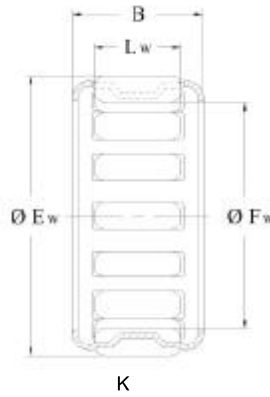

Shaft diameter	Dimensions				Load ratings		Speed ratings		Code bearing HMEC	Weight ≈ kg
	F _w	E _w	B	L _w	dyn. C	stat. Co	min ⁻¹			
	mm				kN		ng grease	ng oil		
28	28	35	27	24.3	33.5	55	9000	15000	K28x35x27	0.047
	28	36	20	15.8	26.5	37.5	9000	15000	K28x36x20	0.049
	28	40	30	26.8	51	68	9000	15000	K28x40x30	0.097
29	29	34	27	23.8	27.5	55	8500	14000	K29x34x27	0.039
30	30	35	13	10.8	15	25.5	8500	14000	K30x35x13	0.017
	30	35	17	14.8	19.3	35.5	8500	14000	K30x35x17	0.022
	30	35	18	15.8	20.4	37.5	8500	14000	K30x35x18	0.023
	30	35	20	17.8	21.6	43	8500	14000	K30x35x20	0.025
	30	35	23	19.8	24.5	47.5	8500	14000	K30x35x23	0.034
	30	35	24	21.8	26	52	8500	14000	K30x35x24	0.030
	30	35	27	24.8	29	60	8500	14000	K30x35x27	0.033
	30	36	14	11.5	17	26.5	8500	14000	K30x36x14	0.023
	30	37	18	14.8	23.2	35.5	8500	14000	K30x37x18	0.040
	30	40	30	25	44	64	8500	14000	K30x40x30	0.081
32	32	36	15	9.8	11	20.4	8000	13000	K32x36x15	0.019
	32	37	13	9.8	14.6	25	8000	13000	K32x37x13	0.021
	32	37	17	13.8	19	35.5	8000	13000	K32x37x17	0.022
	32	37	27	23.8	28	57	8000	13000	K32x37x27	0.042
	32	38	20	17.8	26	46.5	8000	13000	K32x38x20	0.039
	32	38	26	23.8	31.5	58.5	8000	13000	K32x38x26	0.043
	32	39	14	11.8	20	30	8000	13000	K32x39x14	0.033
	32	39	16	12.8	21.2	32.5	8000	13000	K32x39x16	0.038
	32	39	18	15.3	24.5	39	8000	13000	K32x39x18	0.037
	32	40	25	22.3	36	57	8000	13000	K32x40x25	0.057