


## HMEC

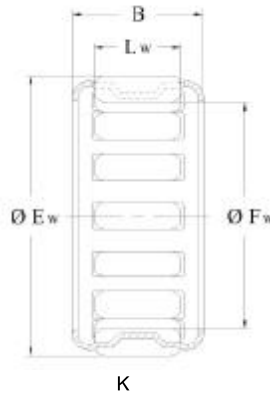

Shaft diameter	Dimensions				Load ratings		Speed ratings		Code bearing HMEC	Weight ≈ kg
	F <sub>w</sub>	E <sub>w</sub>	B	L <sub>w</sub>	dyn. C	stat. Co	min <sup>-1</sup>			
	mm				kN		ng grease	ng oil		
44	44	50	22	18.8	30	61	6300	9500	<b>K 44x50x22</b>	0.046
45	45	50	13	10.8	17.6	36	6300	9500	<b>K 45x50x13</b>	0.024
	45	50	17	14.8	23.6	53	6300	9500	<b>K 45x50x17</b>	0.032
	45	50	21	18.5	23.2	51	6300	9500	<b>K 45x50x21</b>	0.034
	45	50	27	23.8	32.5	78	6300	9500	<b>K 45x50x27</b>	0.058
	45	52	18	14.8	29	53	6300	9500	<b>K 45x52x18</b>	0.052
	45	52	21	17.8	33.5	64	6300	9500	<b>K 45x52x21</b>	0.067
	45	53	20	16.8	34	60	6300	9500	<b>K 45x53x20</b>	0.065
	45	53	21	17.8	37.5	67	6300	9500	<b>K 45x53x21</b>	0.069
	45	53	25	19.8	40.5	75	6300	9500	<b>K 45x53x25</b>	0.094
	45	53	28	24.8	46.5	90	6300	9500	<b>K 45x53x28</b>	0.088
	45	55	20	16.5	40	62	6300	9500	<b>K 45x55x20</b>	0.077
	45	59	18	14	46.5	56	6300	9500	<b>K 45x59x18</b>	0.079
	45	59	36	32.8	78	118	6300	9500	<b>K 45x59x36</b>	0.186
	45	60	40	35	88	134	6300	9500	<b>K 45x60x40</b>	0.305
45	60	45	40	98	153	6300	9500	<b>K 45x60x45</b>	0.342	
47	47	52	17	14.8	23.2	51	6000	9000	<b>K 47x52x17</b>	0.034
	47	52	27	23.8	33.5	83	6000	9000	<b>K 47x52x27</b>	0.049
	47	55	26	21.8	43	83	6000	9000	<b>K 47x55x26</b>	0.101
	47	55	28	23.8	46.5	90	6000	9000	<b>K 47x55x28</b>	0.092
48	48	53	17	14.8	24.5	56	5600	8500	<b>K 48x53x17</b>	0.033
	48	54	19	16.8	29	62	5600	8500	<b>K 48x54x19</b>	0.047
49	49	65	38	34.6	93	140	5600	8500	<b>K 49x65x38</b>	0.249