


**Needle roller and cage assemblies
Series K**

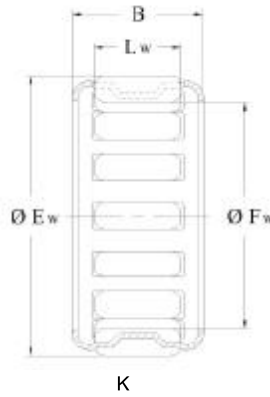

Shaft diameter	Dimensions				Load ratings		Speed ratings		Code bearing HMEC	Weight ≈ kg
	F _w	E _w	B	L _w	dyn. C	stat. Co	min ⁻¹			
	mm				kN		ng grease	ng oil		
60	60	65	30	25.8	40.5	116	4800	7000	K 60x65x30	0.085
	60	68	20	16.8	40	80	4800	7000	K 60x68x20	0.084
	60	68	23	19.8	46.5	98	4800	7000	K 60x68x23	0.112
	60	68	25	21.8	49	104	4800	7000	K 60x68x25	0.123
	6	75	42	38	112	196	4800	7000	K 60x75x42	0.408
63	63	71	20	16.8	39	80	4500	6700	K 63x71x20	0.09
64	64	70	16	11.8	25	56	4500	6700	K 64x70x16	0.061
65	65	70	20	17.8	27	69.5	4300	6300	K 65x70x20	0.054
	65	70	30	25.8	42.5	125	4300	6300	K 65x70x30	0.092
	65	73	30	26.8	57	129	4300	6300	K 65x73x30	0.0131
68	68	74	28	24.8	42.5	110	4000	6000	K 68x74x28	0.081
	68	74	30	26.8	45	120	4000	6000	K 68x74x30	0.098
70	70	76	20	15.8	34	85	4000	6000	K 70x76x20	0.082
	70	76	30	25.8	49	134	4000	6000	K 70x76x30	0.121
	70	78	20	16.8	41.5	90	4000	6000	K 70x78x20	0.099
	70	78	23	19.8	47.5	106	4000	6000	K 70x78x23	0.128
	70	78	30	26.8	58.5	140	4000	6000	K 70x78x30	0.14
72	72	80	20	16.8	42.5	91.5	4000	6000	K 72x80x20	0.101