


**HMEC**

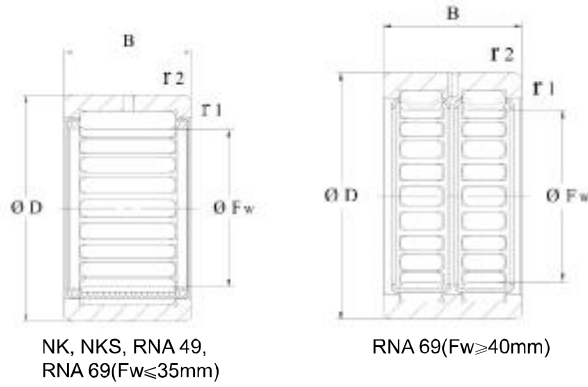

| Shaft diameter | Dimensions     |    |    |                         | Load ratings |          | Speed ratings       |       | Code bearing   | Weight |
|----------------|----------------|----|----|-------------------------|--------------|----------|---------------------|-------|----------------|--------|
|                | F <sub>w</sub> | D  | B  | r <sub>1,2</sub><br>min | dyn. C       | stat. Co | min <sup>-1</sup>   | HMEC  | ≈              |        |
|                | mm             |    |    |                         | kN           |          | ng grease    ng Oil |       | kg             |        |
| 15             | 15             | 23 | 16 | 0.3                     | 10.8         | 13.7     | 16000               | 26000 | <b>NK15/16</b> | 0.024  |
|                | 15             | 23 | 20 | 0.3                     | 13.2         | 17.3     | 16000               | 26000 | <b>NK15/20</b> | 0.030  |
| 16             | 16             | 24 | 13 | 0.3                     | 9.0          | 11.0     | 15000               | 24000 | <b>RNA4901</b> | 0.020  |
|                | 16             | 24 | 16 | 0.3                     | 11.4         | 15       | 15000               | 24000 | <b>NK16/16</b> | 0.025  |
|                | 16             | 24 | 20 | 0.3                     | 13.7         | 19       | 15000               | 24000 | <b>NK16/20</b> | 0.032  |
|                | 16             | 24 | 22 | 0.3                     | 14.3         | 20       | 15000               | 24000 | <b>RNA6901</b> | 0.035  |
| 17             | 17             | 25 | 16 | 0.3                     | 12           | 16       | 15000               | 24000 | <b>NK17/16</b> | 0.027  |
|                | 17             | 25 | 20 | 0.3                     | 13.7         | 19       | 15000               | 24000 | <b>NK17/20</b> | 0.034  |
| 18             | 18             | 26 | 16 | 0.3                     | 12           | 16.3     | 15000               | 24000 | <b>NK18/16</b> | 0.028  |
|                | 18             | 26 | 20 | 0.3                     | 14.3         | 20.4     | 15000               | 24000 | <b>NK18/20</b> | 0.035  |
| 19             | 19             | 27 | 16 | 0.3                     | 12.5         | 17.3     | 14000               | 22000 | <b>NK19/16</b> | 0.029  |
|                | 19             | 27 | 20 | 0.3                     | 15           | 22       | 14000               | 22000 | <b>NK19/20</b> | 0.037  |
| 20             | 20             | 28 | 13 | 0.3                     | 10.2         | 13.7     | 13000               | 20000 | <b>RNA4902</b> | 0.023  |
|                | 20             | 28 | 16 | 0.3                     | 12.5         | 17.6     | 13000               | 20000 | <b>NK20/16</b> | 0.032  |
|                | 20             | 28 | 20 | 0.3                     | 15.6         | 23.6     | 13000               | 20000 | <b>NK20/20</b> | 0.038  |
|                | 20             | 28 | 23 | 0.3                     | 16.6         | 25.5     | 13000               | 20000 | <b>RNA6902</b> | 0.042  |
|                | 20             | 32 | 20 | 0.6                     | 22           | 25       | 13000               | 20000 | <b>NKS20</b>   | 0.058  |
| 21             | 21             | 29 | 16 | 0.3                     | 13.4         | 20       | 13000               | 20000 | <b>NK21/16</b> | 0.032  |
|                | 21             | 29 | 20 | 0.3                     | 16.3         | 25       | 13000               | 20000 | <b>NK21/20</b> | 0.040  |