


Angular Contact Ball Bearings Double Row

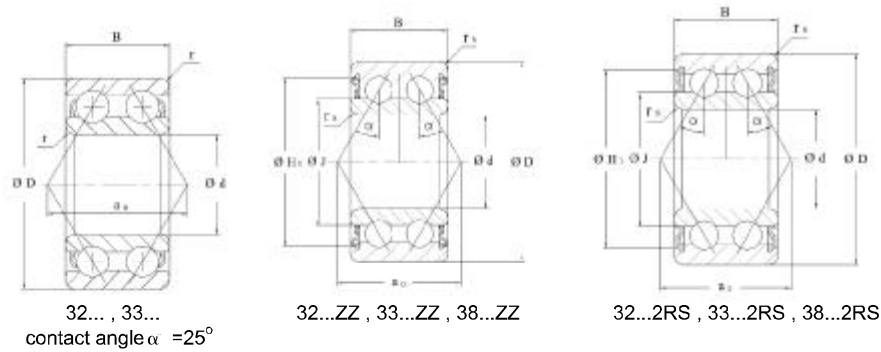

Shaft diameter	Dimensions					Load rating		Limiting speed	Reference speed	Code bearing	Mass
	d	D	B	$r_{s \min}$	α°	dyn. C	stat. Co				
mm						≈ kN	min ⁻¹		HMEC	≈ kg	
10	10	30	14	0.6	15	7.8	4.55	22000	24000	3200	0.05
	10	30	14	0.6	15	7.8	4.55	16000	24000	3200 ZZ	0.052
	10	19	7	0.3	8.1	2.1	1.4	22500	29200	3800 2RS	0.008
	10	19	7	0.3	8.1	2.1	1.4	22500	29200	3800 ZZ	0.008
12	12	32	15.9	0.6	17	10.6	5.85	20000	24000	3201	0.051
	12	32	15.9	0.6	17	10.6	5.85	15000	24000	3201 ZZ	0.053
	12	21	7	0.3	8.9	2.19	1.55	20000	20000	3801 2RS	0.008
	12	21	7	0.3	8.9	2.19	1.55	20000	20000	3801 ZZ	0.008
15	15	35	15.9	0.6	18	11.8	7.1	19000	20000	3202	0.065
	15	35	15.9	0.6	18	11.8	7.1	14000	20000	3202 ZZ	0.067
	15	35	15.9	0.6	18	11.8	7.1	12000	-	3202 2RS	0.067
	15	42	19	1	21	16.3	10	16000	14000	3302	0.124
	15	24	7	0.3	10	2.43	1.96	17500	16500	3802 2RS	0.009
	15	24	7	0.3	10	2.43	1.96	17500	16500	3802 ZZ	0.009
17	17	40	17.5	0.6	20	14.6	9	17000	18000	3203	0.093
	17	40	17.5	0.6	20	14.6	9	12000	18000	3203 ZZ	0.095
	17	40	17.5	0.6	20	14.6	9	10000	-	3203 2RS	0.095
	17	47	22.2	1	24	20.8	12.5	15000	13000	3303	0.177
	17	26	7	0.3	10.9	2.48	2.08	15000	14500	3803 2RS	0.015
	17	26	7	0.3	10.9	2.48	2.08	15000	14500	3803 ZZ	0.015
20	20	47	20.6	1	24	19.6	12.5	15000	16000	3204	0.154
	20	47	20.6	1	24	19.6	12.5	10000	16000	3204 ZZ	0.16