


Angular Contact Ball Bearings Double Row

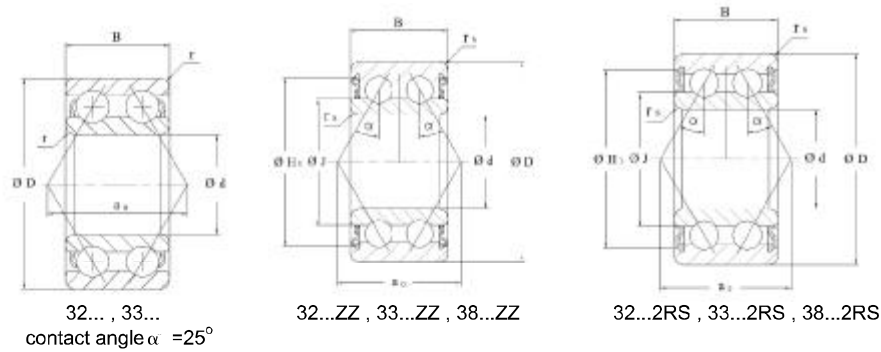

Shaft diameter	Dimensions					Load rating		Limiting speed	Reference speed	Code bearing	Mass
	d	D	B	$r_{s \min}$	α°	dyn. C	stat. Co				
	mm					\approx kN	min ⁻¹			HMEC	\approx kg
70	70	125	39.7	1.5	62	83	76.5	4500	6300	3214	1.8
	70	150	63.5	2.1	109	143	166	4000	4800	3314	5.03
	70	90	15	0.6	38.5	19.2	23.8	4400	4400	3814 2RS	0.19
	70	90	15	0.6	38.5	19.2	23.8	4400	4400	3814 ZZ	0.19
75	75	130	41.3	1.5	65	91.5	85	4300	6000	3215	1.91
	75	160	68.3	2.1	117	163	193	3800	4300	3315	6.4
80	80	140	44.4	2	69	95	93	4000	5600	3216	2.45
	80	140	44.4	2	69	95	93	3000	5600	3216 ZZ	2.48
	80	170	68.3	2.1	123	176	212	3600	4000	3316	7.26
	80	100	15	0.6	42.2	19.6	25.5	4000	4000	3816 2RS	0.23
	80	100	15	0.6	42.2	19.6	25.5	4000	4000	3816 ZZ	0.23
85	85	150	49.2	2	106	112	150	3800	5000	3217	3.44
	85	180	73	3	131	190	228	3400	3800	3317	8.78
90	90	160	52.4	2	113	125	170	3600	4800	3218	4.22
	90	190	73	3	136	216	275	3200	3400	3318	9.23
95	95	170	55.6	2.1	120	140	186	3400	4500	3219	5.31
	95	200	77.8	3	143	220	285	3200	3200	3319	11.2