


Self Aligning Ball Bearing

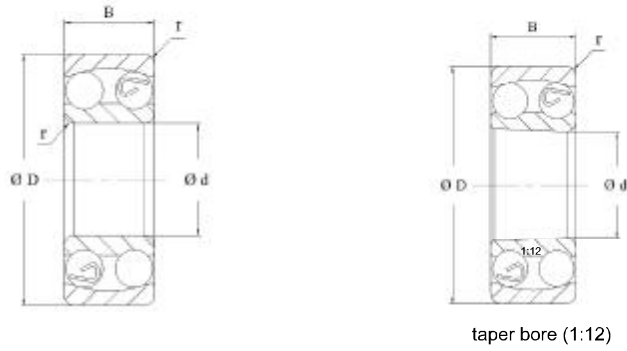

Shaft diameter	Dimensions				Load rating		Limiting speed		Code		Mass	
	d	D	B	r _{s min}	dyn. Cr	stat. Cor	min ⁻¹		Bearing HMEC		≈	
	mm				kN		ng grease	ng Oil	Cylindrical Bore	Taper Bore	Cylindrical Bore	Taper Bore
10	10	30	9	0.6	5.50	1.19	21000	24000	1200	-	0.033	-
	10	30	14	0.6	7.30	1.59	19000	23000	2200	-	0.047	-
	10	35	11	0.6	7.25	1.62	18000	21000	1300	-	0.058	-
	10	35	17	0.6	10.1	2.15	17000	20000	2300	-	0.083	-
12	12	32	10	0.6	5.6	1.27	18000	22000	1201	-	0.04	-
	12	32	14	0.6	7.60	1.73	17000	20000	2201	-	0.051	-
	12	37	12	1	9.45	2.16	16000	18000	1301	-	0.066	-
	12	37	17	1	11.8	2.71	15000	17000	2301	-	0.091	-
15	15	35	11	0.6	7.45	1.75	16000	19000	1202	-	0.049	-
	15	35	14	0.6	7.70	1.85	15000	18000	2202	-	0.060	-
	15	42	13	1	9.55	2.30	13000	16000	1302	-	0.092	-
	15	42	17	1	12.0	2.90	13000	15000	2302	-	0.114	-
17	17	40	12	0.6	7.90	2.01	14000	17000	1203	-	0.072	-
	17	40	16	0.6	9.80	2.41	13000	16000	2203	-	0.088	-
	17	47	14	1	12.5	3.20	12000	14000	1303	-	0.218	-
	17	47	19	1	14.4	3.55	11000	14000	2303	-	0.156	-
20	20	47	14	1	9.90	2.61	13000	15000	1204	1204K	0.116	0.114
	20	47	18	1	12.6	3.30	12000	14000	2204	2204K	0.140	0.137
	20	52	15	1.1	12.4	3.35	11000	13000	1304	1304K	0.160	0.158
	20	52	21	1.1	18.1	4.70	10000	12000	2304	2304K	0.206	0.201