


## Self Aligning Ball Bearin

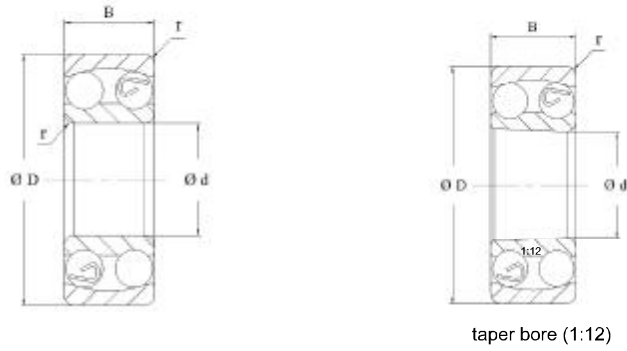

Shaft diameter	Dimensions				Load rating		Limiting speed		Code		Mass	
	d	D	B	r <sub>s min</sub>	dyn. Cr	stat. Cor	min <sup>-1</sup>		Bearing HMEC	≈	kg	
	mm				kN		ng grease	ng Oil	Cylindrical Bore	Taper Bore	Cylindrical Bore	Taper Bore
100	100	180	34	2.1	69.0	29.7	2900	3400	<b>1220</b>	<b>1220K</b>	3.70	3.64
	100	180	46	2.1	94.0	38.5	2700	3200	<b>2220</b>	<b>2220K</b>	4.65	4.54
	100	215	47	3	143	57.5	2400	2900	<b>1320</b>	<b>1320K</b>	8.30	8.19
	100	215	73	3	192	79.0	2300	2700	<b>2320</b>	<b>2320K</b>	11.5	11.2
105	105	190	36	2.1	74.5	32.5	2800	3300	<b>1221</b>	-	4.34	-
	105	190	50	2.1	109	45.0	2600	3100	<b>2221</b>	-	6.07	-
	105	225	49	3	156	64.5	2300	2700	<b>1321</b>	-	10.0	-
	105	225	77	3	205	87.0	2200	2600	<b>2321</b>	-	13.2	-
110	110	200	38	2.1	80.5	35.5	2600	3100	<b>1222</b>	<b>1222K</b>	5.15	5.07
	110	200	53	2.1	124	51.5	2500	2900	<b>2222</b>	<b>2222K</b>	7.10	6.94
	110	240	50	3	164	71.5	2200	2600	<b>1322</b>	<b>1322K</b>	11.8	11.7
	110	240	80	3	217	94.5	2100	2400	<b>2322</b>	<b>2322K</b>	15.8	15.4