


## HMEC

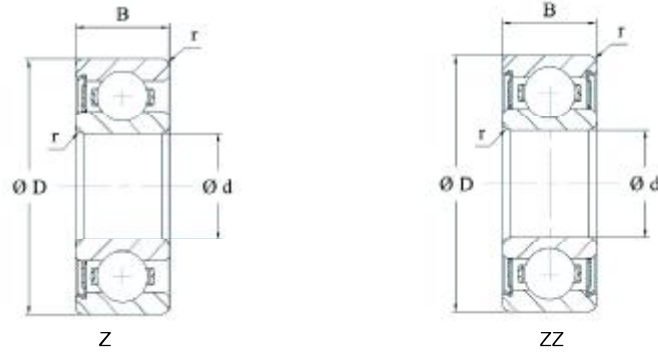

| Shaft diameter | Dimensions |     |    |                  | Load rating |          | Limiting speed    | Code bearing   | Mass  |
|----------------|------------|-----|----|------------------|-------------|----------|-------------------|----------------|-------|
|                | d          | D   | B  | r <sub>min</sub> | dyn. C      | stat. Co |                   |                |       |
|                | mm         |     |    |                  | kN          |          | min <sup>-1</sup> | HMEC           | ≈ kg  |
| 105            | 105        | 145 | 20 | 1.1              | 42.50       | 42.00    | 4300              | <b>6921.ZZ</b> | 0.856 |
|                | 105        | 160 | 18 | 1                | 54          | 54       | 9500              | <b>16021</b>   | 1.24  |
|                | 105        | 160 | 26 | 2                | 71          | 64       | 9000              | <b>6021</b>    | 1.67  |
|                | 105        | 160 | 26 | 2                | 71          | 64       | 3800              | <b>6021.ZZ</b> | 1.7   |
|                | 105        | 190 | 36 | 2.1              | 132         | 104      | 7500              | <b>6221</b>    | 3.88  |
|                | 105        | 190 | 36 | 2.1              | 132         | 104      | 3200              | <b>6221.ZZ</b> | 3.99  |
|                | 105        | 225 | 49 | 3                | 173         | 146      | 6700              | <b>6321</b>    | 8.7   |
| 110            | 110        | 140 | 16 | 1                | 28.10       | 32.50    | 5300              | <b>6822</b>    | 0.497 |
|                | 110        | 140 | 16 | 1                | 28.10       | 32.50    | 4300              | <b>6822.ZZ</b> | 0.497 |
|                | 110        | 150 | 20 | 1.1              | 43.50       | 44.50    | 5000              | <b>6922</b>    | 0.893 |
|                | 110        | 150 | 20 | 1.1              | 43.50       | 44.50    | 4300              | <b>6922.ZZ</b> | 0.893 |
|                | 110        | 170 | 19 | 1                | 57          | 57       | 9000              | <b>16022</b>   | 1.51  |
|                | 110        | 170 | 28 | 2                | 80          | 71       | 8500              | <b>6022</b>    | 2.06  |
|                | 110        | 170 | 28 | 2                | 80          | 71       | 3600              | <b>6022.ZZ</b> | 2.11  |
|                | 110        | 200 | 38 | 2.1              | 143         | 116      | 7000              | <b>6222</b>    | 4.64  |
|                | 110        | 200 | 38 | 2.1              | 143         | 116      | 3000              | <b>6222.ZZ</b> | 4.8   |
|                | 110        | 240 | 50 | 3                | 190         | 166      | 6300              | <b>6322</b>    | 10.3  |
|                | 110        | 240 | 50 | 3                | 190         | 166      | 2600              | <b>6322.ZZ</b> | 10.5  |