


## HMEC

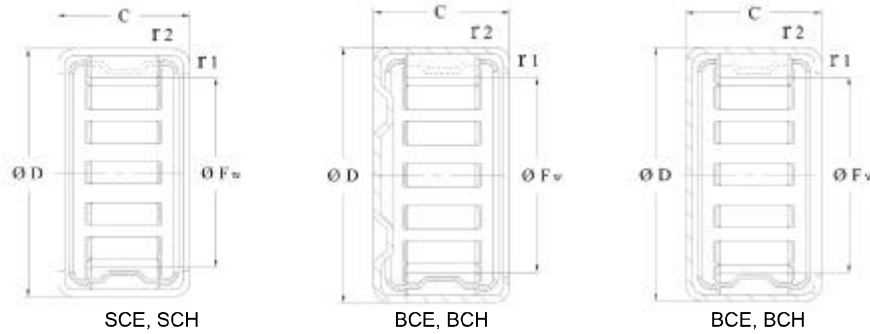

Shaft diameter	Dimensions			Basic Load Rating		Limiting speeds min <sup>-1</sup>	Code bearing HMEC	
	Fw	D	C	Dyn Cr	Stat. Cor		Open end	Closed end
				N				
34.925	34.925	41.275	25.400	27500	59000	8000	<b>SCE2216</b>	-
	34.925	41.275	31.750	34000	77000	8000	<b>SCE2220</b>	<b>BCE2220</b>
	34.925	44.450	19.050	29500	45000	8000	<b>SCH2212</b>	<b>BCH2212</b>
	34.925	44.450	25.400	39000	65000	8000	<b>SCH2216</b>	<b>BCH2216</b>
38.100	38.100	47.625	12.700	18600	26000	7400	<b>SCE248</b>	<b>BCE248</b>
	38.100	47.625	15.875	24400	36500	7400	<b>SCE2410</b>	<b>BCE2410</b>
	38.100	47.625	19.050	30500	48500	7400	<b>SCE2412</b>	<b>BCE2412</b>
	38.100	47.625	22.225	36000	60000	7400	<b>SCE2414</b>	<b>BCE2414</b>
	38.100	47.625	25.400	38500	66000	7400	<b>SCE2416</b>	<b>BCE2416</b>
	38.100	47.625	31.750	47500	86000	7400	<b>SCE2420</b>	<b>BCE2420</b>
41.275	41.275	50.800	15.875	25500	40000	6800	<b>SCE2610</b>	<b>BCE2610</b>
	41.275	50.800	31.750	51000	97000	6800	<b>SCE2620</b>	<b>BCE2620</b>
44.450	44.450	53.975	19.050	31500	55000	6300	<b>SCE2812</b>	<b>BCE2812</b>
	44.450	53.975	25.400	41500	76000	6300	<b>SCE2816</b>	<b>BCE2816</b>
	44.450	53.975	31.750	55000	108000	6300	<b>SCE2820</b>	-
	44.450	53.975	38.100	62000	130000	6300	<b>SCE2824</b>	<b>BCE2824</b>
50.800	50.800	60.325	12.700	21800	35000	5500	<b>SCE328</b>	-
	50.800	60.325	15.875	28500	49500	5500	<b>SCE3210</b>	-
	50.800	60.325	25.400	41500	80000	5500	<b>SCE3216</b>	<b>BCE3216</b>
	50.800	60.325	31.750	55000	116000	5500	<b>SCE3220</b>	-
	50.800	60.325	38.100	62000	123000	5500	<b>SCE3224</b>	-