


## HMEC

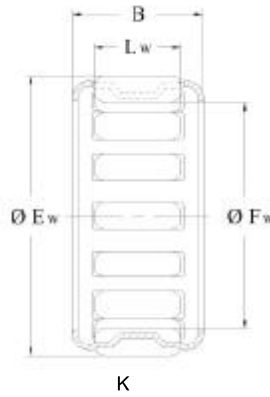

Shaft diameter	Dimensions				Load ratings		Speed ratings		Code bearing HMEC	Weight ≈ kg
	F <sub>w</sub>	E <sub>w</sub>	B	L <sub>w</sub>	dyn. C	stat. Co	min <sup>-1</sup>			
	mm				kN		ng grease	ng oil		
32	32	42	42	38.8	65.5	108	8000	13000	<b>K 32x42x42</b>	0.119
34	34	44	26	20	40.5	58.5	7500	12000	<b>K 34x44x26</b>	0.085
35	35	40	13	10.8	15.6	28	7500	12000	<b>K 35x40x13</b>	0.019
	35	40	17	14.8	20	39	7500	12000	<b>K 35x40x17</b>	0.026
	35	40	19	16.8	22	44	7500	12000	<b>K 35x40x19</b>	0.032
	35	40	25	22.5	27	57	7500	12000	<b>K 35x40x25</b>	0.034
	35	40	27	24.8	28.5	60	7500	12000	<b>K 35x40x27</b>	0.036
	35	40	31	28.8	32	69.5	7500	12000	<b>K 35x40x31</b>	0.041
	35	42	16	13.3	23.6	37.5	7500	12000	<b>K 35x42x16</b>	0.036
	35	42	18	15.3	26	43	7500	12000	<b>K 35x42x18</b>	0.040
	35	42	30	25.8	38	71	7500	12000	<b>K 35x42x30</b>	0.062
	35	45	20	17	35.5	50	7500	12000	<b>K 35x45x20</b>	0.077
	35	45	41	37.8	67	114	7500	12000	<b>K 35x45x41</b>	0.13
	35	45	49	45.5	78	137	7500	12000	<b>K 35x45x49</b>	0.147
36	36	40	29	23.8	20.4	47.5	7500	12000	<b>K 36x40x29</b>	0.02
	36	42	16	13.5	21.6	38	7500	12000	<b>K 36x42x16</b>	0.03
37	37	42	13	10.8	16.3	30	7000	11000	<b>K 37x42x13</b>	0.02
	37	42	17	14.8	20.8	41.5	7000	11000	<b>K 37x42x17</b>	0.026
	37	42	27	23.8	30.5	68	7000	11000	<b>K 37x42x27</b>	0.049
	37	44	19	16.3	28.5	49	7000	11000	<b>K 37x44x19</b>	0.044
38	38	43	17	13.8	20.8	41.5	7000	11000	<b>K 38x43x17</b>	0.032